


Horizontal Roller

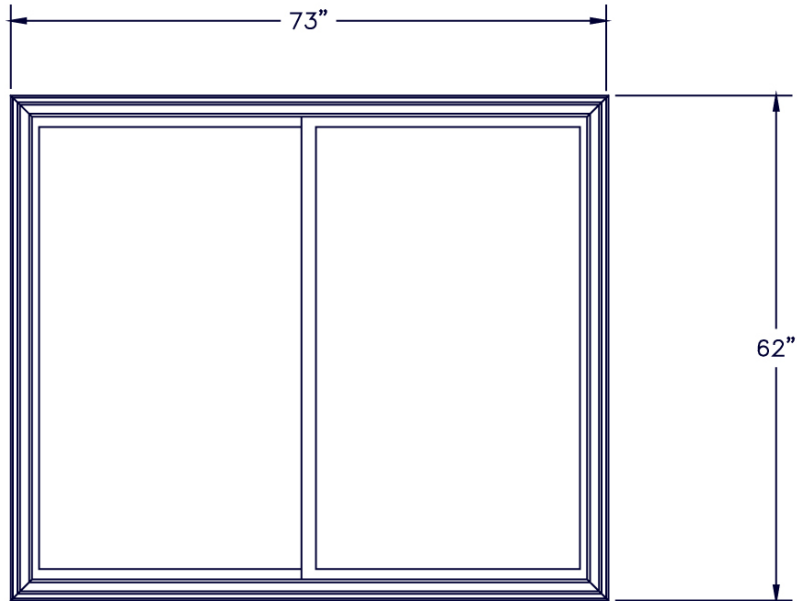

Product:

Simonton StormBreaker Plus® Vinyl Horizontal Roller



- 73" x 62" tip-to-tip not to exceed size in width or in height
- 1" Insulating Glass Unit w/Warm-edge Spacer System
- PVB/Tempered (all associated glass Double-strength or better)
- Sealant Glazed
- E9 Reinforcement
- Specific hardware must be anchored to the opening. Refer to written installation instructions on AND to applicable drawings sealed by a Florida professional engineer.

REV. #	REVISIONS	REVISION BY	DATE


INDICATES THAT PRODUCTION IS TO FABRICATE THIS PARTICULAR HOLE.

STORMBREAKER PLUS AND FLORIDA CUSTOMERS HORIZONTAL ROLLER (EXCLUDES PROFINISH AND LUMINES) RETROFIT ONLY INSTALLATION PROCEDURE

- NOTES:
- A. USE #10 X 2" FASTENERS IN THE INTERIOR TRACK OF THE HORIZONTAL ROLLER FRAME TO ANCHOR TO SUBSTRUCTURE. (USE 2 1/4" X 1/4" DIA. TAPCON TYPE ANCHOR IN MASONRY CONSTRUCTION.)
 - B. AT SILL ONLY, USE #10 X 2" FASTENERS WITH GASKET WASHER AND CAULK AROUND THE SCREW IN THE INTERIOR TRACK OF THE HORIZONTAL ROLLER. ENSURE THE SILL IS FIRMLY SUPPORTED THE ENTIRE WIDTH OF THE WINDOW. (USE 2 1/4" X 1/4" DIA. TAPCON TYPE ANCHOR IN MASONRY CONSTRUCTION.)
 - C. REPLACE ONE L-BRACKET SCREW IN THE EXTERIOR TRACK OF THE WINDOW WITH AN INSTALLATION SCREW THROUGH THE HEAD, #8 X 2 1/2". (USE 2 3/4" X 3/16" DIA. TAPCON TYPE ANCHOR IN MASONRY CONSTRUCTION.)
 - D. WHEN HEAD EXPANDERS ARE USED, INSTALLER MUST ADJUST ANCHOR LENGTH TO MAINTAIN MINIMUM EMBEDMENT IN SUBSTRUCTURE.

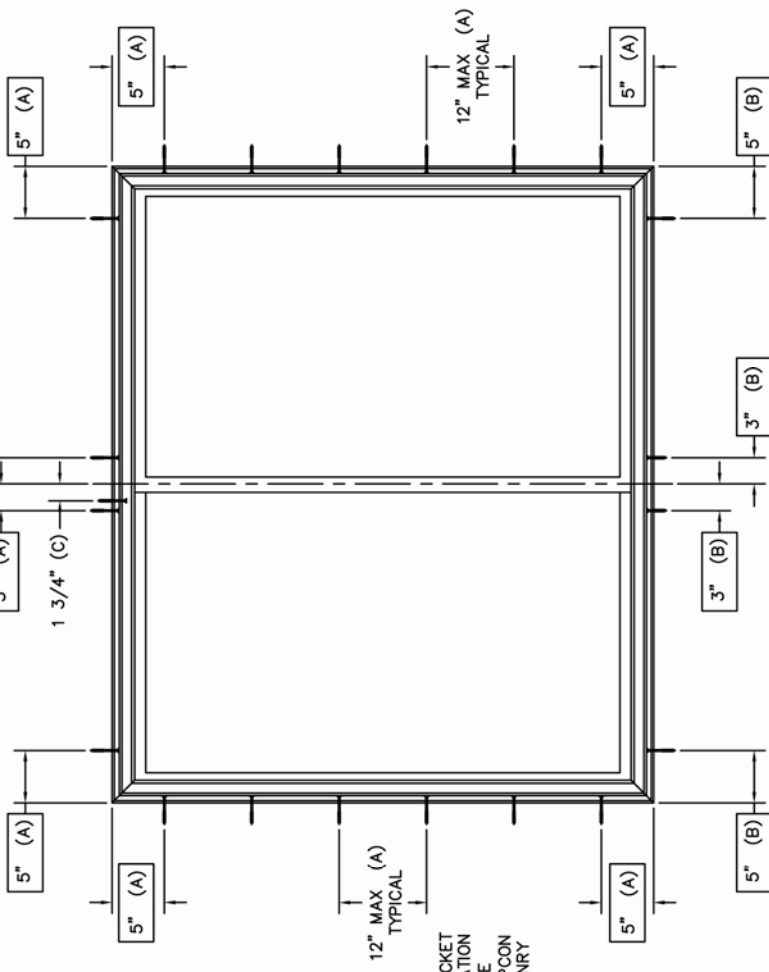

(C) REPLACE ONE L-BRACKET SCREW WITH AN INSTALLATION SCREW, #8 X 2 1/2" (USE 2 3/4" X 3/16" DIA. TAPCON TYPE ANCHOR FOR MASONRY INSTALLATION.)



(B) * #10 X 2" MIN. SHEET METAL SCREW W/ 1.5" MIN. EMBEDMENT INTO WOOD (USE CAULK AROUND THE SCREWS AT THE SILL ONLY)

<p>DISCLOSURE STATEMENT</p> <p>This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Simonton Windows. This disclosure statement is provided for the recipient's rights to utilize information contained in this document which is properly obtained from another source.</p> <p>FILE: INGR16</p>	<p>MATERIAL:</p> <p>FINISH: ALLOY & TEMPER</p> <p>REMARKS:</p> <p>VOLUME:</p> <p>SURFACE AREA:</p> <p>PERIMETER:</p>	<p>Dimensional Tolerances Unless Otherwise Specified</p> <p>Decimals: X ± .03</p> <p>Angles: .XX ± .01</p> <p>XXX ± .005</p>	<p>REVISION NO.:</p> <p>DATE:</p> <p>DESIGNED BY:</p> <p>DATE:</p> <p>CHECKED BY:</p> <p>DATE:</p> <p>APPROVED BY:</p> <p>DATE:</p>
--	--	--	---

<p>SCALE: FT</p> <p>SHEET: 1 of 1</p>	<p>07-09 HORIZONTAL SLIDER</p> <p>INSTALLATION INSTRUCTIONS</p>
---------------------------------------	---